

# S700 Label Dispenser

Quick & Easy Label Dispensing



Designed to dispense

- Small
- Transparent
- Silver polyester
- Thin labels



Adjustable  
sensor position



Detects  
transparent labels



Portable

# S700 Label Dispenser General Specifications

Dimensions	Standar model: W110 mm x L260 mm x H170 mm
Weight	Standard model: 1550g (excludes battery)
Power supply	AC Adaptor
Label feed speed	Max. 110 mm/s (size and material etc. of the label varies depending on the usage environment)
Supported label sizes	Label Width: 15 ~ 70 mm (backing paper width 18 ~ 73 mm) Label Length: 10 ~ 150 mm Core ID: min. 25 mm Label Roller Outer Diameter: max 120 mm
Energy saving function	Auto power off (power off for every 5 minutes of non-operation)
Protection function.	
Auto stop when detecting label	Auto stop when detecting low battery

Optional accessories

Battery pack, battery charger, sync connector

## Applications

### RETAIL @ POS COUNTER

Season / Event seals, corporate image seals

### S70 WITH SYNC CONNECTOR


Up to three sets of S700 dispensers can be linked up together and operated simultaneously (with the optional multilink Sync connector sold separately).

Advantages of the multilink feature:

- Dispenses more than one label (of a different design if required) at once
- Useful where 2 - 3 different labels need to be applied in consecutive order
- Reduces operator error: a linked dispenser does not dispense the next label until all other dispenser labels have been peeled off
- Prevents tired operators from mistakenly peeling and pasting labels from the same dispenser

### INDUSTRIAL

Silver polyester label 50μ, synthetic labels, foil paper, small pitch labels

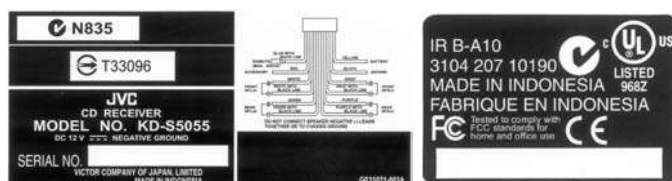

## Optional accessories

Spare battery packs and a charger for allowing extended battery-powered operation

Multi-linked 3 units of S70 for sequential labelling of a product